




filtra

water filtration and
purification systems

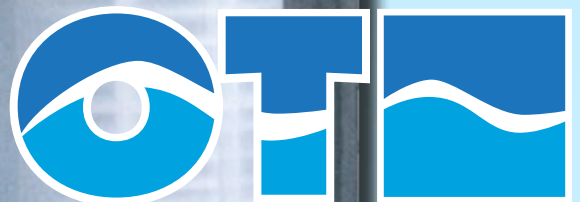

The OT filter housing range has been designed to meet the requirements of the most demanding customers, especially where high standards of mechanic resistance and long life are required. The 3/4" and 1" housings can fit standard 9"3/4 and 20" cartridges, while 1"1/2 - 1"1/4 - 2" housings usually fit special 10" and 20" cartridges, which allow higher flow rate.

Three versions of OT filter housings are available: with a transparent SAN bowl, with a transparent POLYAMIDE bowl, with and a INOX AISI 304 bowl.

HEAD: OT 58 brass.
 RING NUT: OT58 brass.
 BOWL: transparent SAN, polyamide, INOX AISI 304.
 O-RING: nbr.
 RELIEF VALVE: Brass.
 WORKING PRESSURE: 10 bar max.
 BURST PRESSURE: 35 bar.
 MAX TEMPERATURE: 60° C.
 CYCLING TESTS: 200.000 cycle at 0-10 bar.



Models	Connections	Cartridge	Dimensions		Flow-rate l/H	Packing
			L	H		
OT 605	3/4"	5"	135	200	2000	6
OT 609	3/4"	9"3/4	135	320	2500	6
OT 620	3/4"	20"	135	565	3500	6
OT 605	1"	5"	135	200	2000	6
OT 609	1"	9"3/4	135	320	3900	6
OT 620	1"	20"	135	565	5000	6
OT 610	1"1/4	*10"	150	335	6200	6
OT 620	1"1/4	*20"	150	580	8000	6
OT 610	1"1/2	*10"	150	335	10000	6
OT 620	1"1/2	*20"	150	580	12500	6
OT 610	2"	*10"	162	363	13000	6
OT 620	2"	*20"	162	595	16000	6

* it fits BX cartridges



new !!

Our 3/4" - 1" filter housings with head having the possibility of being bracketed, and the 5" San or Polyamide bowl are now available.



Space for authorised dealer



Via Mons. Bonacini, 1 - 42015 Correggio (RE)
 Tel. 0522 632 262 - Fax. 0522 637 162
 e-mail: filtra@filtrasrl.com - www.filtrasrl.com